


Serenity Wall Basin Set 160/185/220mm Offset Spout Trim Kit Only

Nero




Lead Free

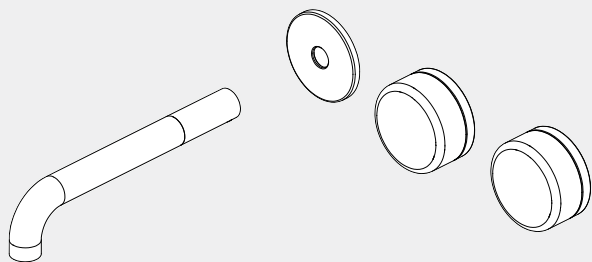

Version: 2020606

Drawing

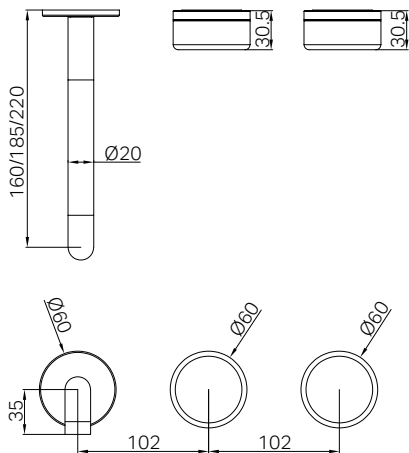

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

- 1x Spout
- 1x Backplate
- 2x Handwheels
- 1x Installation Kits
- 1x Non-Restricting Aerator

*Dimensions are nominal measurements only

**Includes an additional non-restricting aerator for bath use

Finish & SKU



Chrome



Gun Metal



Brushed Bronze



Matte Black



Brushed Gold



Brushed Nickel



Rome Bronze



Tumbled Antique Brass

Serenity Wall Basin Set 160mm Offset Spout With Carrara Handle Trim Kit Only

24D092BZ/ 24D092BG / 24D092BN/24D092GM / 24D092MB / 24D092CH

Serenity Wall Basin Set 160mm Offset Spout With Verde Alpi Handle Trim Kit Only

24D093BZ/ 24D093BG / 24D093BN/24D093GM / 24D093MB / 24D093CH

Serenity Wall Basin Set 160mm Offset Spout With Rome Travertine Handle Trim Kit Only

24D094BZ/ 24D094BG / 24D094BN/24D094GM / 24D094MB / 24D094CH

Serenity Wall Basin Set 160mm Offset Spout With Arabescato Corchia Handle Trim Kit Only

24D095BZ/ 24D095BG / 24D095BN/24D095GM / 24D095MB / 24D095CH

Serenity Wall Basin Set 160mm Offset Spout With Metal Handle Trim Kit Only

24D097BZ/ 24D097BG / 24D097BN/24D097GM / 24D097MB / 24D097CH

Serenity Wall Basin Set 160mm Offset Spout With Marquina Black Handle Trim Kit Only

24D113BZ/ 24D113BG / 24D113BN/24D113GM / 24D113MB / 24D113CH

Serenity Wall Basin Set 185mm Offset Spout With Carrara Handle Trim Kit Only

24D098BZ/ 24D098BG / 24D098BN/24D098GM / 24D098MB / 24D098CH

Serenity Wall Basin Set 185mm Offset Spout With Verde Alpi Handle Trim Kit Only

24D099BZ/ 24D099BG / 24D099BN/24D099GM / 24D099MB / 24D099CH

Serenity Wall Basin Set 185mm Offset Spout With Rome Travertine Handle Trim Kit Only

24D100BZ/ 24D100BG / 24D100BN/24D100GM / 24D100MB / 24D100CH

Serenity Wall Basin Set 185mm Offset Spout With Arabescato Corchia Handle Trim Kit Only

24D101BZ/ 24D101BG / 24D101BN/24D101GM / 24D101MB / 24D101CH

Serenity Wall Basin Set 185mm Offset Spout With Metal Handle Trim Kit Only

24D103BZ/ 24D103BG / 24D103BN/24D103GM / 24D103MB / 24D103CH
24D103RB/ 24D103TA

Serenity Wall Basin Set 185mm Offset Spout With Marquina Black Handle Trim Kit Only

24D114BZ/ 24D114BG / 24D114BN/24D114GM / 24D114MB / 24D114CH

Serenity Wall Basin Set 220mm Offset Spout With Carrara Handle Trim Kit Only

24D104BZ/ 24D104BG / 24D104BN/24D104GM / 24D104MB / 24D104CH

Serenity Wall Basin Set 220mm Offset Spout With Verde Alpi Handle Trim Kit Only

24D105BZ/ 24D105BG / 24D105BN/24D105GM / 24D105MB / 24D105CH

Serenity Wall Basin Set 220mm Offset Spout With Rome Travertine Handle Trim Kit Only

24D106BZ/ 24D106BG / 24D106BN/24D106GM / 24D106MB / 24D106CH

Serenity Wall Basin Set 220mm Offset Spout With Arabescato Corchia Handle Trim Kit Only

24D107BZ/ 24D107BG / 24D107BN/24D107GM / 24D107MB / 24D107CH

Serenity Wall Basin Set 220mm Offset Spout With Metal Handle Trim Kit Only

24D109BZ/ 24D109BG / 24D109BN/24D109GM / 24D109MB / 24D109CH
24D109RB/ 24D109TA

Serenity Wall Basin Set 220mm Offset Spout With Marquina Black Handle Trim Kit Only

24D115BZ/ 24D115BG / 24D115BN/24D115GM / 24D115MB / 24D115CH

Installation Instruction

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that the installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

NOTE:

- Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.
- It is the responsibility of the plumber to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.
- The marble stone hand wheel crafted from natural marble. Each handle boasts unique variations in color, veining, and texture, making every piece one of a kind.


MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.
- Avoid contact with highly pigmented substances such as red wine, coffee and ink, as they may cause permanent staining.


FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.


Installation Instruction

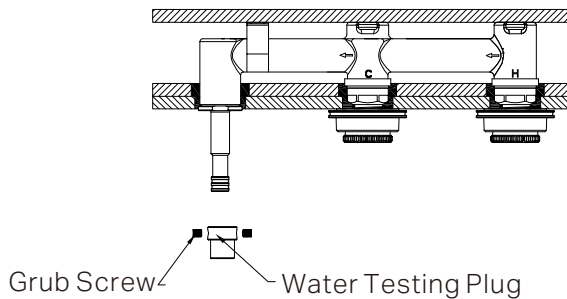

1. Release the grub screws to remove the water testing plug.

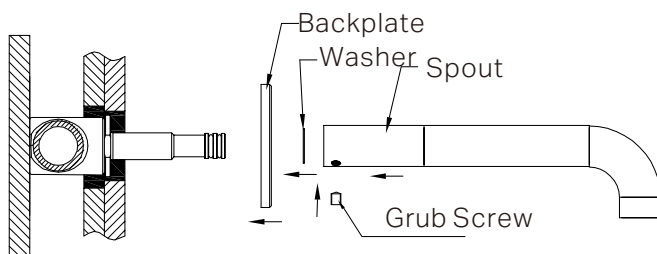

2. Slide the backplate and washer onto the wall. Ensure the spout is aligned and secure it firmly using the supplied grub screw.

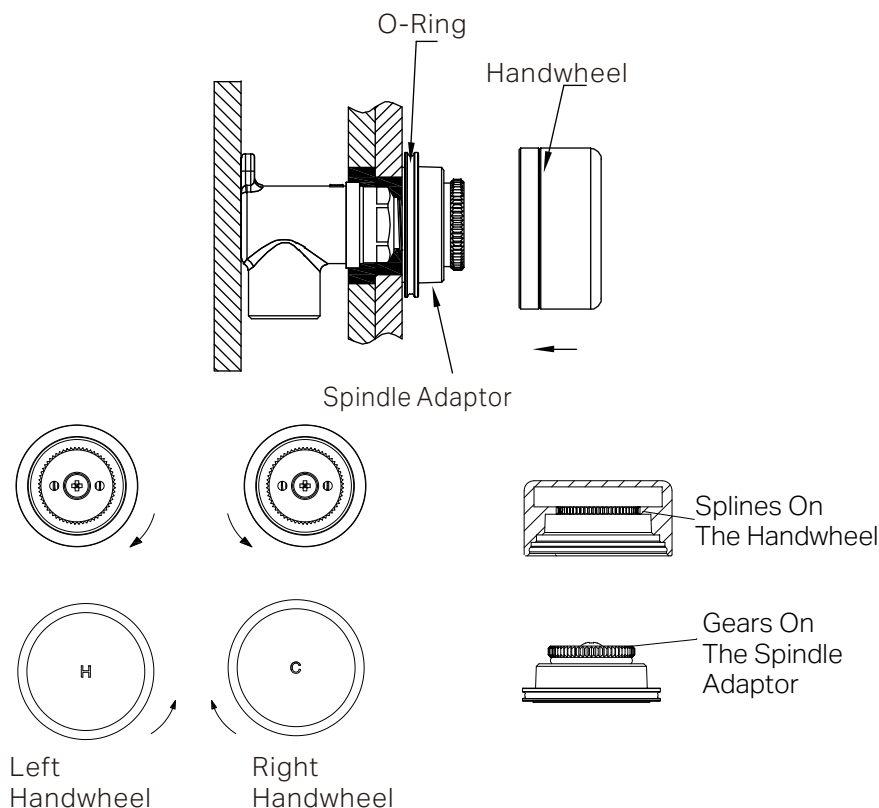

3. Apply lubrication evenly to the O-Ring. Refer to the diagram to identify the correct O-Ring position. Ensure the O-Ring is well-lubricated to prevent damage during installation.

For Metal Handwheels:

Rotate the left spindle adaptor clockwise to its fully closed position.

Rotate the right spindle adaptor counterclockwise to its fully closed position.

Refer to the diagram for clarification.

For Marble Handwheels:

No adjustment to the spindle adaptor is necessary.

Align the Handwheel with the Spindle Adaptor:

Ensure the spline on the underside of the handwheel align perfectly with the gears on the spindle adaptor, as shown in the above diagram.


This alignment is crucial for proper functionality.

Secure the Handwheel:

Once aligned, press the handwheel down firmly onto the spindle adaptor.

Tip:

For metal handwheels, ensure the handwheel marked "H" is installed on the left side and the handwheel marked "C" is installed on the right side.

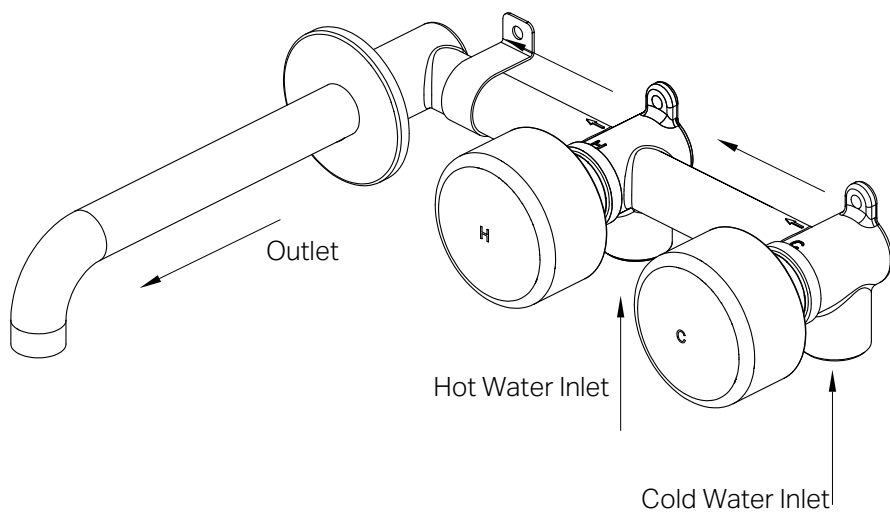

4. Turn on the drainage system and water supply, and inspect all connections for any signs of leakage.

Note: If you bought marble handwheel product, there are no hot/cold markings are applied to the handwheels.

Nero

