


Opal Wall Basin/Bath Mixer

Nero




Lead Free

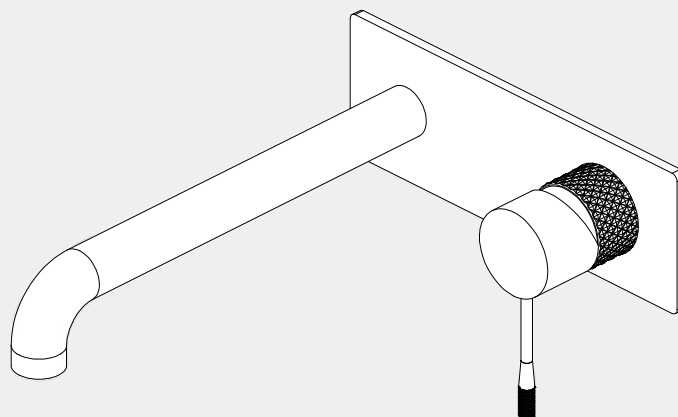

Versions:202506



Drawing

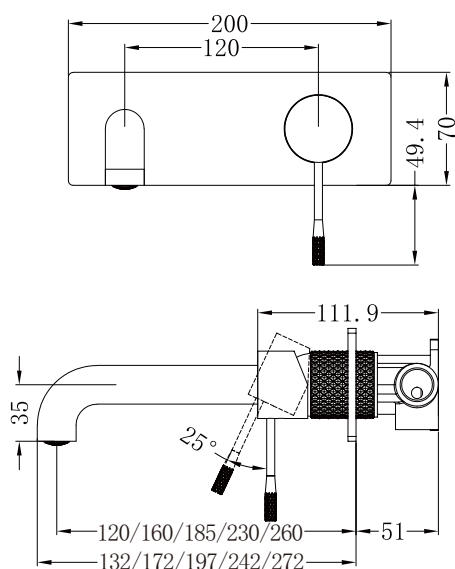

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

- 1x Mixer Body
- 1x Handle
- 1x Spout
- 1x Plate
- 1x Aerator Driver
- 1x None Restricted Aerator


Finish & SKU

- | | |
|---|---|
| <ul style="list-style-type: none"> ● Brushed Bronze
NR251907aBZ
NR251907a(120/160/230/260)BZ | <ul style="list-style-type: none"> ● Graphite
NR251907aGR
NR251907a(120/160/230/260)GR |
| <ul style="list-style-type: none"> ● Brushed Gold
NR251907aBG
NR251907a(120/160/230/260)BG | <ul style="list-style-type: none"> ● Brushed Nickel
NR251907aBN
NR251907a(120/160/230/260)BN |

*Dimensions are nominal measurements only

**Includes an additional non-restricting aerator for bath use


Installation Instruction

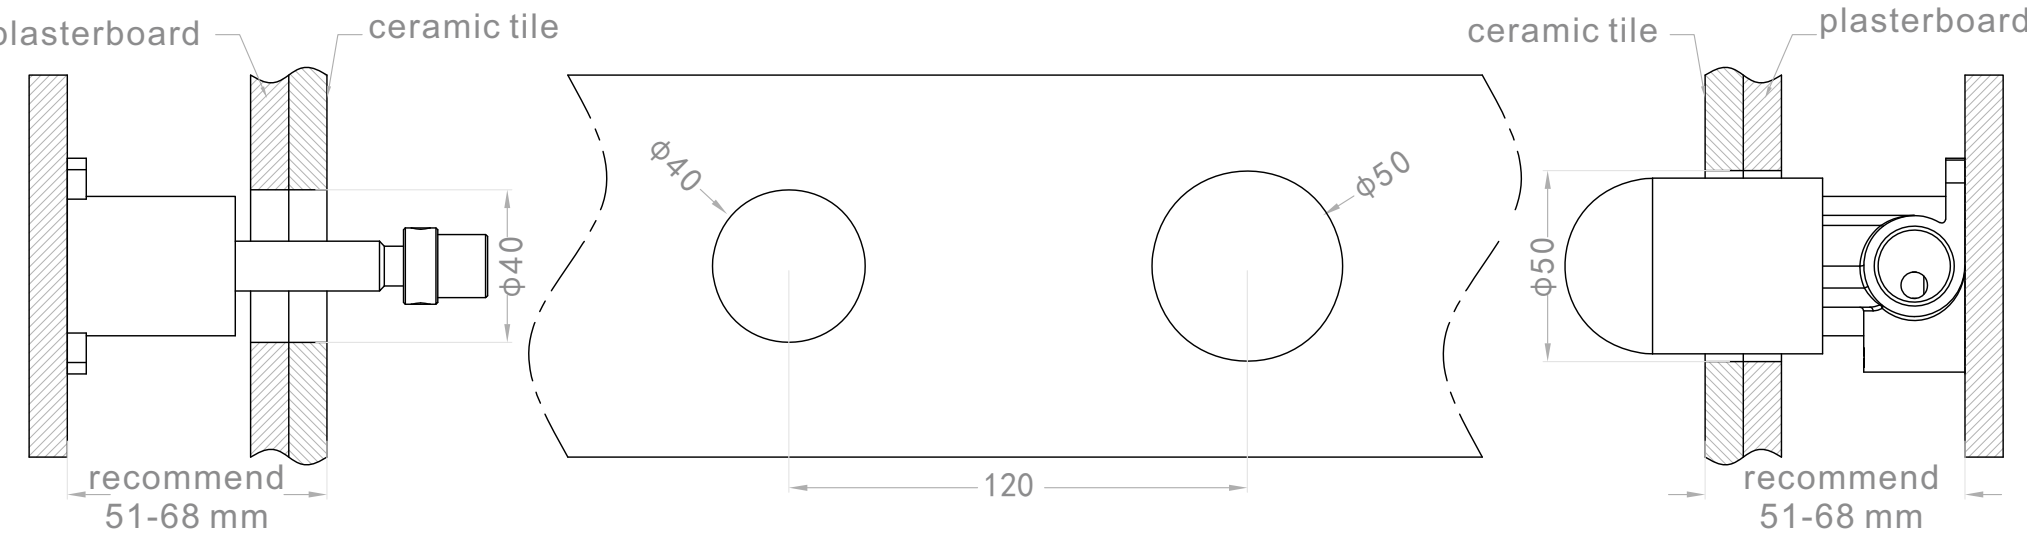

- 1. Fix body on noggin and ensure installation depth is 51-68mm from noggin to ceramic tile.
- 2. Connect cold water hose and hot water hose and conduct water pressure test for leakage.
- 3. Install plasterboard and ceramic tile after drilling a $\phi 50$ and a $\phi 40$ hole according to above picture.



- 4. Remove the plastic sleeve, grub screw and water testing plug.

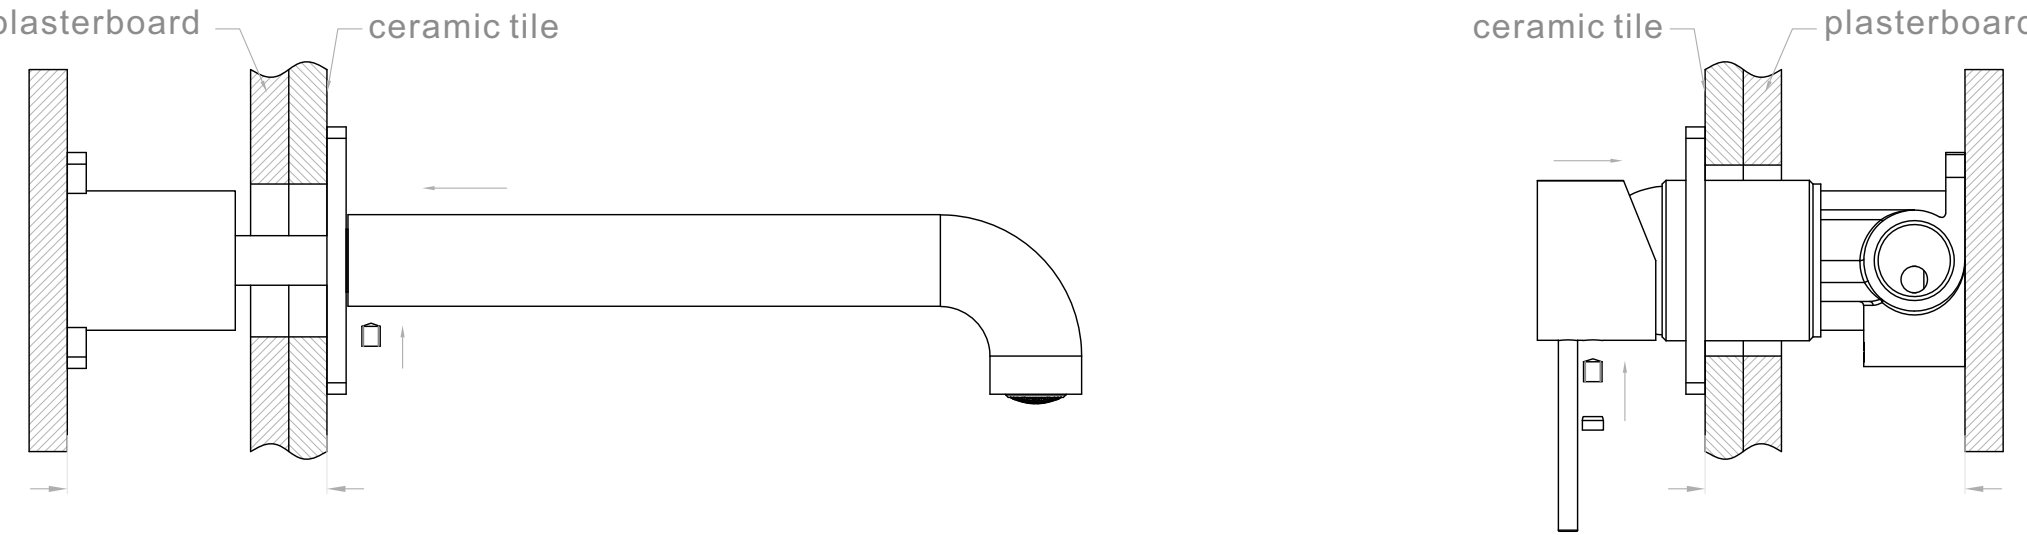

- 5. Install washer, plate, spout and handle.

Nero

